STORM JIB	DACRON 902	24-0	13-0	15 0	84
STORM TRYS'L	DACRON 902	15'-0"	11'-6"	19'-0"	85
SPINNAKER	NYLON 1.2 OZ	39'-10"	31' 9.5	39'-10"	1084*
REACHER	DACRON 902	38'-0"	23.5'	31' 8"	455*

P² - 38'-0" J = 17' 9"

NOTES

~~RECOMMEND BAINBRIDGE TAN COLOR CLOTH~~
FOR WORKING CANVAS - SLAB REEFING
WITH HAND SEWN 1" I.D. GROMMETS AT
REEF TACK AND CLEW - ALL GROMMETS
HAND SEWN - ALL SEAMS TRIPLE STITCHED
THIS IS A BATTENLESS MAINSAIL CUT
MODERATELY FULL WITH CUNNINGHAM
HOLE WITH LARGE RE-ENFORCED GROMMET
18" UP FROM BOOM AND 3" AFT OF MAST.
3/16" - 3' 7-19 PENNANT ON TACK OF
STORM JIB - MINIMUM ROACH ON
ALL HEADSAILS EXCEPT REACHER
* APP 5' REVERSE ROACH ON STAYS'L LEACH

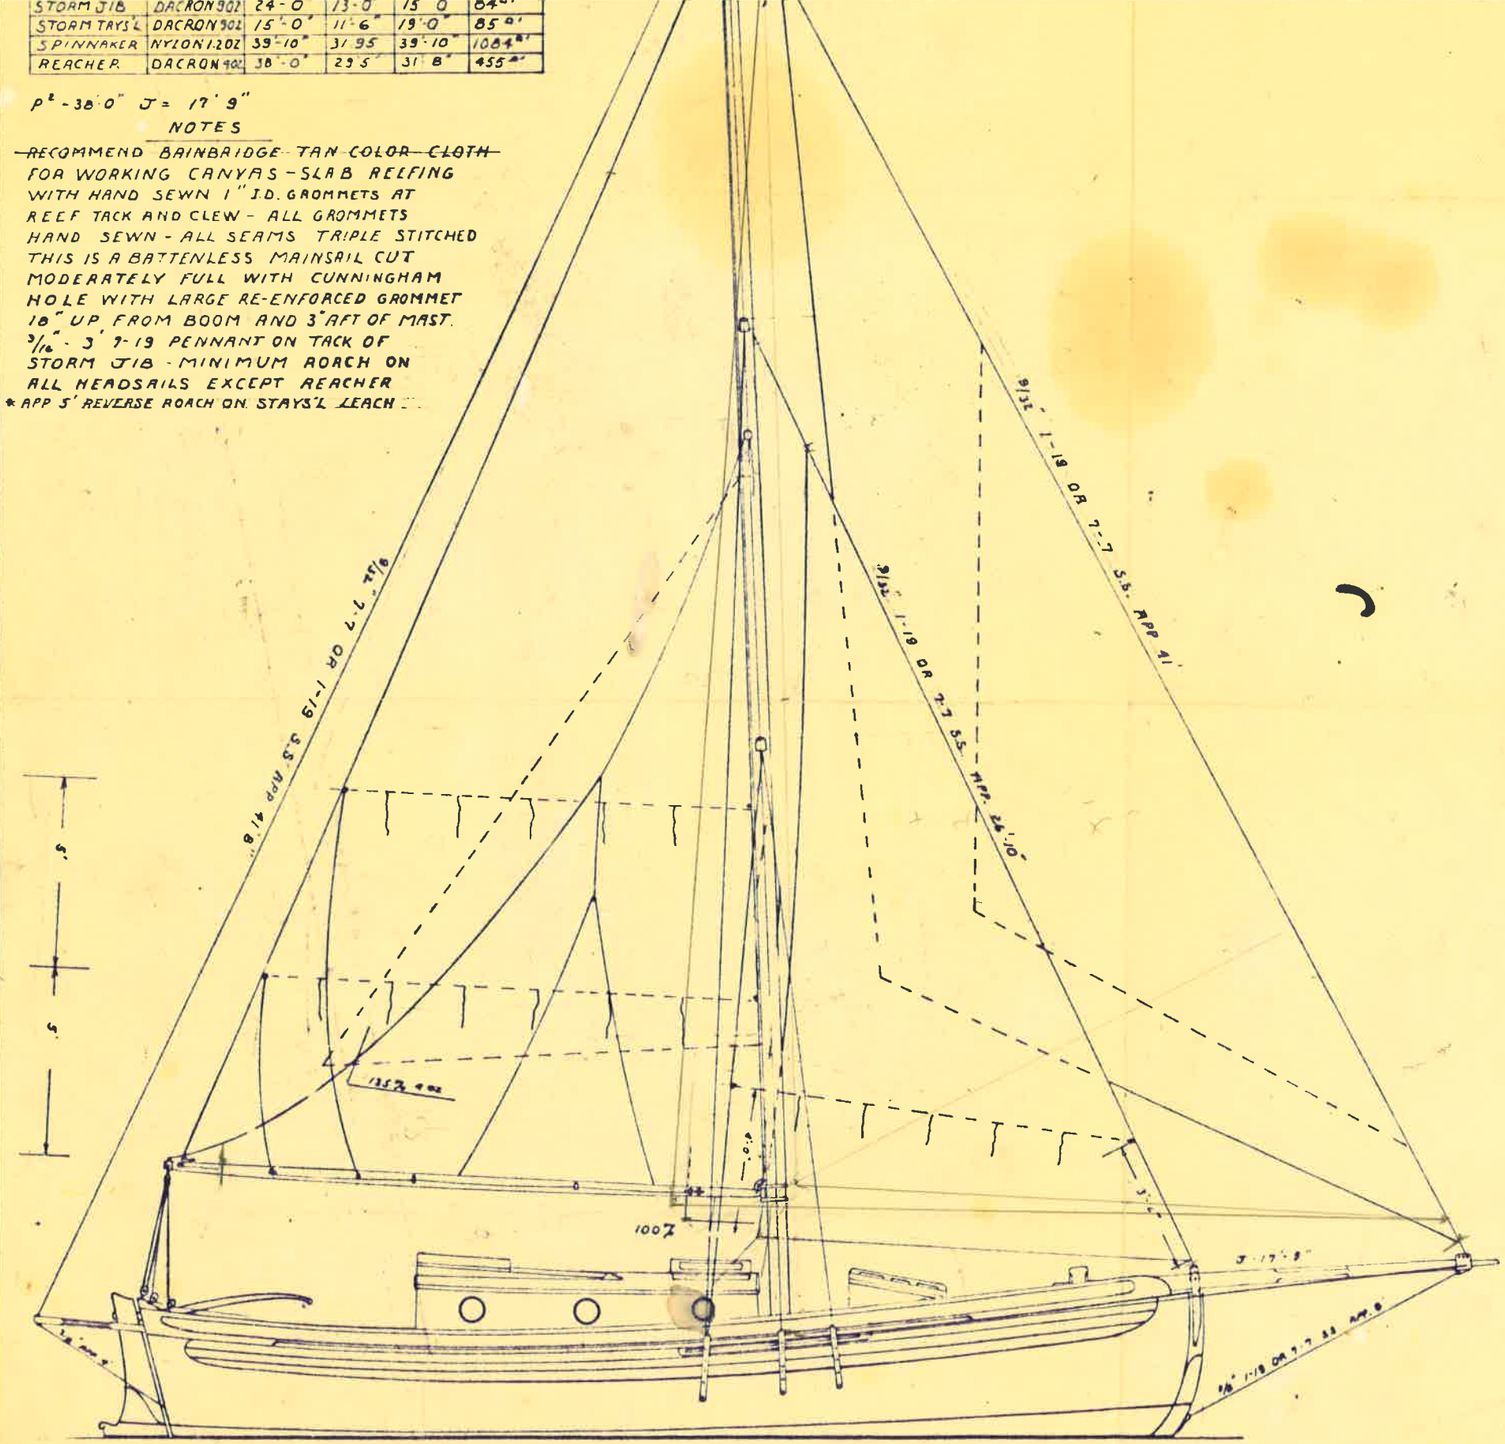

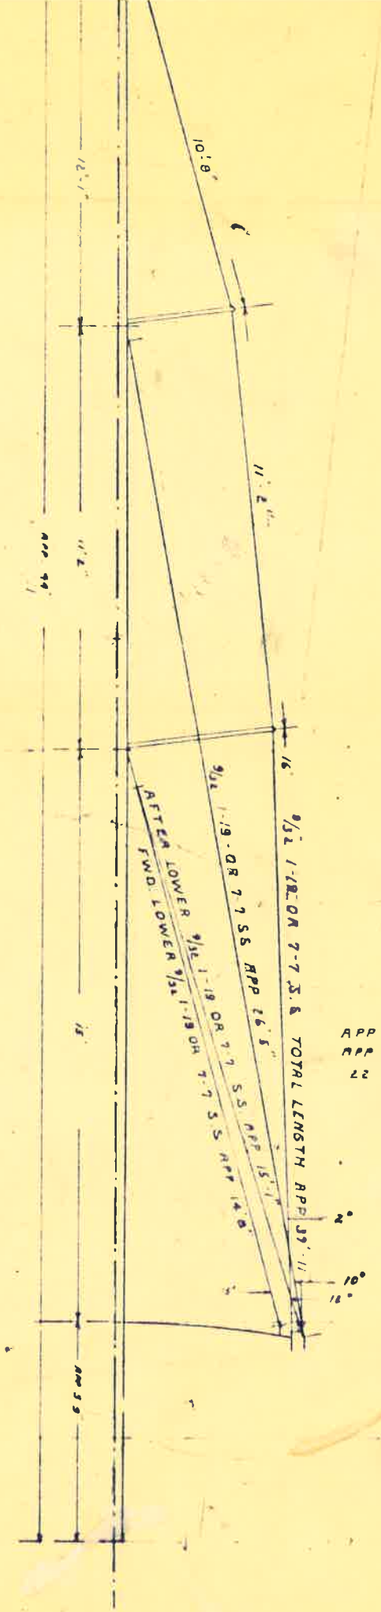

APP 300 - 9/32 1-19 - S.S. WIRE
APP 322 - 9/32 7-7 SS WIRE
22 SOLID THIMBLES FOR 7-7 SPLICES

BRISTOL CHANNEL CUTTER
DESIGNED BY LYLE C. HESS
OWNER SAM MORSE YACHT BUILDERS
COSTA MESA, CALIFORNIA
MAINS'L 254 SQ. FT. — 238
STAYS'L 130 SQ. FT. 118
JIB 195 SQ. FT. 223 ← Current
TOTAL 579

SCALE ½" = 1'

LOA 28'-0
LWL 26'-3"
BEAM - 10'-1"
DRAFT 4'-10"
DISP 14,000 LBS.
BALLAST 4600 LBS.